

Heavy Duty Wheels

■ Swivel castors – Drawing No. R6




Model SL ... S, K, S/P

Range of application:

- For transporting loads at a maximum speed of 100 m/min.
- For turning corners.



Characteristics of the model ... SL:

- Solid steel construction of the self-guided castor.
- Can be combined with other mountings.
- Passed the DIN 4422 test at the material research laboratory for SL 150 S + SL 150 K.

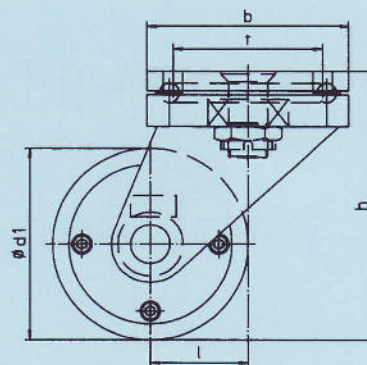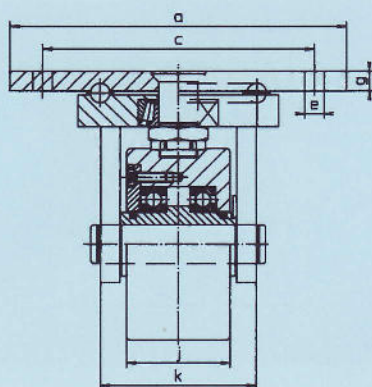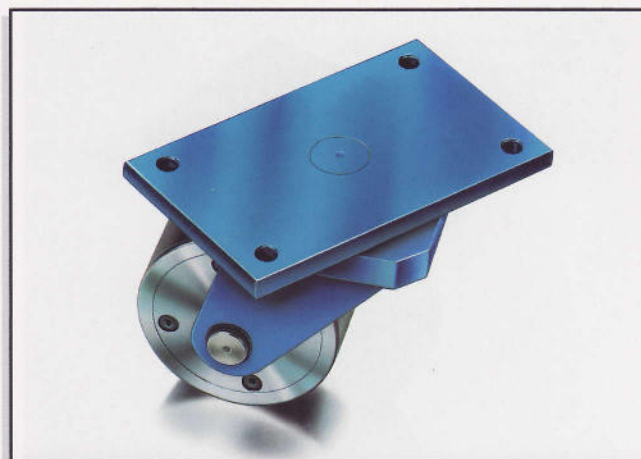

Model SL ... S, SL ... K

Mod.		a	b	c	Ø d1	Ø e	f	g	h	j	k		Suitable castors	Carrying capacity (kN)		Weight (kg)	
Steel	Plastic													S	K	S	K
SL 150 S	SL 150 K	270	150	210	150	18	115	15	210	80	120	75	SF	30	20	22.7	16.7
SL 175 S	SL 175 K	270	150	210	175	18	115	15	235	80	120	75	SF	30	20	27.5	18.2
SL 200 S	SL 200 K	270	150	210	200	18	115	15	260	80	120	75	SF	30	30	32.9	19.8

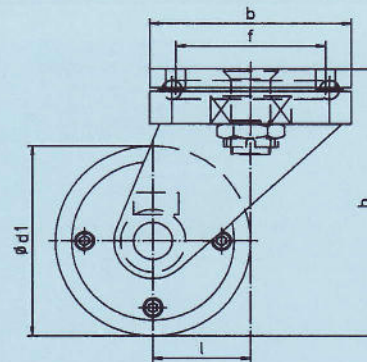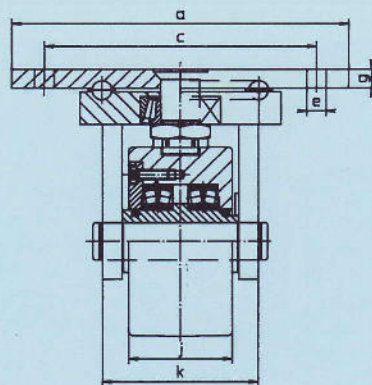

Model SL ... S/P

Mod.		a	b	c	Ø d1	Ø e	f	g	h	j	k		Suitable castors	Carrying capacity (kN)		Weight (kg)	
Steel																	
SL 150 S/P		270	170	220	150	18	130	20	220	80	130	80	SF	50			22.9
SL 175 S/P		270	170	220	175	18	130	20	245	80	130	80	SF	50			27.7
SL 200 S/P		270	170	220	200	18	130	20	285	80	130	80	SF	60			33.1