

HPX | MANUALLY OPERATED ULTRA HIGH PRESSURE PUMPS




Compact lightweight aluminium construction

Two stage operation

Choice of 1500 or 2800 bar pressure rating

- ▶ Oil reservoir capacity 1.2 litres
- ▶ External pressure release valve and factory set safety valve
- ▶ Specifically designed for high pressure applications
- ▶ Integrated pressure gauge with scale reading bar and psi
- ▶ Bespoke handle with ergonomic grip and mesh guard to protect pressure gauge

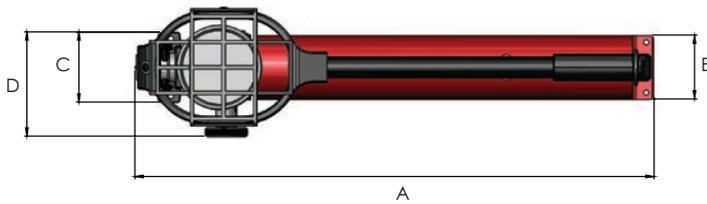

Model number	Working pressure (bar)	Usable oil capacity (litres)	Displacement per stroke (cm ³)		Outlet port	Weight (kg)	Dimensions (mm)				
			1 st stage	2 nd stage			A	B	C	D	E
HPX1500	1500	1.2	20	1	1/4" BSP	6.5	615	161	84	125	76.5
HPX2800	2800	1.2	20	0.8	3/16" - 18 UNF	6.5	615	161	84	125	76.5

OPTIONAL HOSES:

Model number	Working pressure (bar)	Description	Weight (kg)
XHH3-15	1500	3 metres hose with 1/4" BSP male thread each end	1.4
XHH5-15	1500	5 metres hose with 1/4" BSP male thread each end	2.6
XHH3-30	2800	3 metres hose with 3/16" - 18 UNF male coned thread each end	3.2
XHH5-30	2800	5 metres hose with 3/16" - 18 UNF male coned thread each end	5.1