

TWS-N | HYDRAULIC TORQUE WRENCHES - SQUARE DRIVE




Torque capacities up to 36992 Nm

Torque accuracy of +/- 3%

Working pressure 700 bar

- ▶ Compact, lightweight aluminium body construction
- ▶ Output torque capacities from 1727 to 36992 Nm (1254 to 26860 lbf.ft)
- ▶ Choice of square drive sizes from ¾" to 2 ½"
- ▶ Reversible square drive for tightening or loosening applications
- ▶ Multi-position reaction arm with safety lock feature
- ▶ All models are fitted with a multi-directional 360° x 180° swivel with quick release couplings. The multi-directional feature enables easy positioning of hydraulic hoses during operation, preventing damage from pinching or kinking
- ▶ High quality torque wrench sockets for use with TWS-N range hydraulic wrenches are listed on pages 87 and 88
- ▶ Optional allen hex drives available from ½" to 2 ¼" and 14 to 60 mm (see page 89)

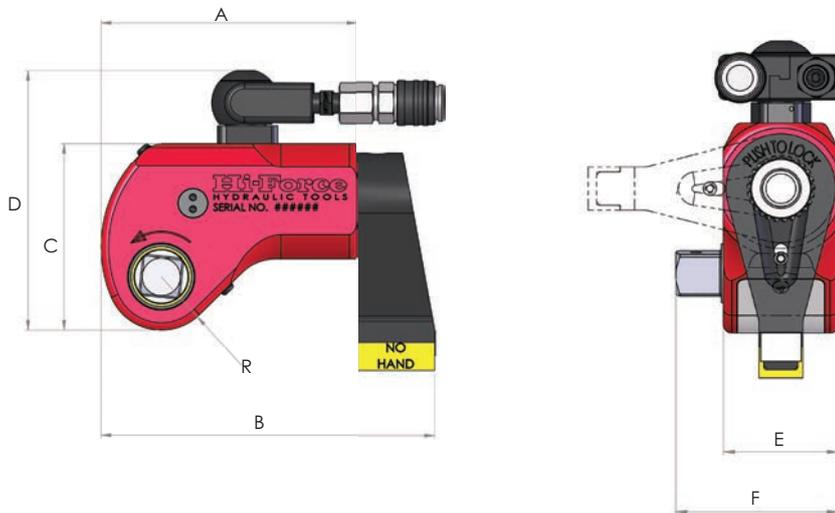

Model number	Torque capacity		Square drive size	Weight including reaction foot (kg)	Dimensions (mm)						
	Nm at 700 bar	lbf.ft at 10,000 psi			A	B	C	D	E	F	R
TWS17N	1727	1254	¾"	1.9	134	174	93	141	51	73	28
TWS45N	4529	3289	1"	4.8	170	222	126	175	68	98	36
TWS100N	10064	7527	1 ½"	9.0	223	293	163	211	92	134	46
TWS150N	14974	10873	1 ½"	15.0	247	323	189	237	100	138	54
TWS370N	36992	26860	2 ½"	32.5	329	432	239	289	137	200	66