

AHP2 | AIR DRIVEN HYDROTEST PUMPS - MEDIUM FLOW




- ▶ Infinitely variable output pressure and fluid displacement speed
- ▶ Integral inlet air filtration and lubrication unit with air pressure gauge
- ▶ Airline regulator for easy setting of input air and output hydraulic pressure
- ▶ Maximum air consumption of 1.59 m³ (56 scfm) per minute at 7 bar
- ▶ Smooth and easily operated hydraulic pressure hold and release valve
- ▶ Fitted with input air pump start/stop valve for easy and fast pressure shut off
- ▶ Robust powder coated stainless steel protective framework
- ▶ Lightweight plastic, 7.5 litres capacity, fluid reservoir
- ▶ Optional stainless steel reservoir, stroke counter system and pressure isolation valve available on request

Output pressures up to 1634 bar

Suitable for use with various fluids

150 mm dual scale vibra pressure gauge

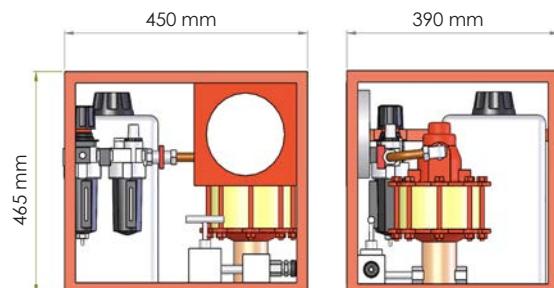

Model number	Max output pressure (bar) at airline input pressure 10 psi 0.69 bar	Max output pressure (bar) at airline input pressure 50 psi 3.45 bar	Max output pressure (bar) at airline input pressure 100 psi 6.9 bar	Fluid volume displacement per stroke (cm ³)	Outlet port thread	Weight (kg)
AHP2-036	17.2	124.1	248.2	40.8	1/2" NPT	24
AHP2-060	31	199.9	413.7	24.6	1/2" NPT	24
AHP2-097	51.7	327.5	668.8	15.2	1/2" NPT	24
AHP2-144	75.8	489.5	992.8	10.2	1/2" NPT	24
AHP2-237	131	799.8	1634.1	6.1	5/16" -18 UNF	24

Hydraulic pressure		Approximate rate of discharge (litres/min) at air input pressure 100 psi (7 bar)				
psi	bar	AHP2-036	AHP2-060	AHP2-097	AHP2-144	AHP2-237
0	0	10.2	6.2	3.9	2.7	1.57
500	35	8.6	5.5	3.55	2.5	1.52
1000	69	7.25	4.8	3.19	2.35	1.47
1500	104	6.15	4.5	3	2.16	1.42
2000	138	5.4	4.2	2.87	2.15	1.38
3000	207	3.05	3.5	2.55	1.88	1.29
4000	276	*	2.75	2.28	1.75	1.22
5000	345	*	2.16	2.1	1.64	1.2
7500	517	*	*	1.45	1.35	1.1
10000	690	*	*	*	1.15	0.98
15000	1034	*	*	*	*	0.78
20000	1379	*	*	*	*	0.51
23700	1634	*	*	*	*	0.34

* Pressure exceeds pump capacity