

SCP | SELF-CONTAINED HYDRAULIC PULLERS




Capacities from 8 to 26 tonnes

Self-contained hydraulic system

Operates in any position

- ▶ Available in a choice of 2-way or 3-jaw configurations (see Note)
- ▶ Integrated hydraulic cylinder, pump and puller assembly for easy operation
- ▶ Ergonomic 360° rotating handle for easy positioning during use
- ▶ Incorporates safety valve to minimise the risk of puller overload
- ▶ Spring-loaded centre point for easy centering of the puller to the shaft
- ▶ Supplied complete with piston rod extension piece and storage case

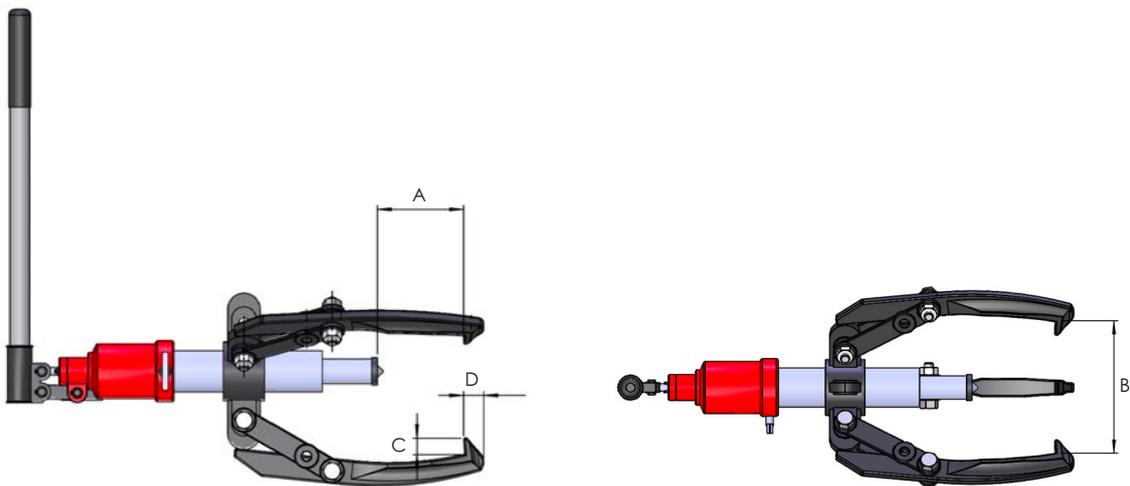

Model number	Capacity (tonnes)	Type of puller	Hydraulic stroke (mm)	Piston rod extension (mm)	Weight (kg)	Dimensions (mm)				
						A	B (min)	B (max recommended)	C	D
SCP103	8	2 & 3-way jaw	82	50	11.6	195	30	250	22	6
SCP203	17	2 & 3-way jaw	82	100	23.7	275	50	360	29	10
SCP303	26	2 & 3-way jaw	110	150	50.0	405	100	540	38	36

Note: All models are supplied with a combination crosshead. This combination crosshead can be used as a 2-jaw puller when the legs are arranged at 180° and as a 3-jaw puller when the legs are arranged at 120°.